


Cable Stripper GB-L20


Manual instruction

One tool for all cross sections 35 mm² and 500 mm² without usage of silicone grease.

The Distancering guarantees a soft end cut avoiding sharp edges.


Due to the construction of the tool the cutting speed is automatically made. A constant faultness finishing of the surface is the result.

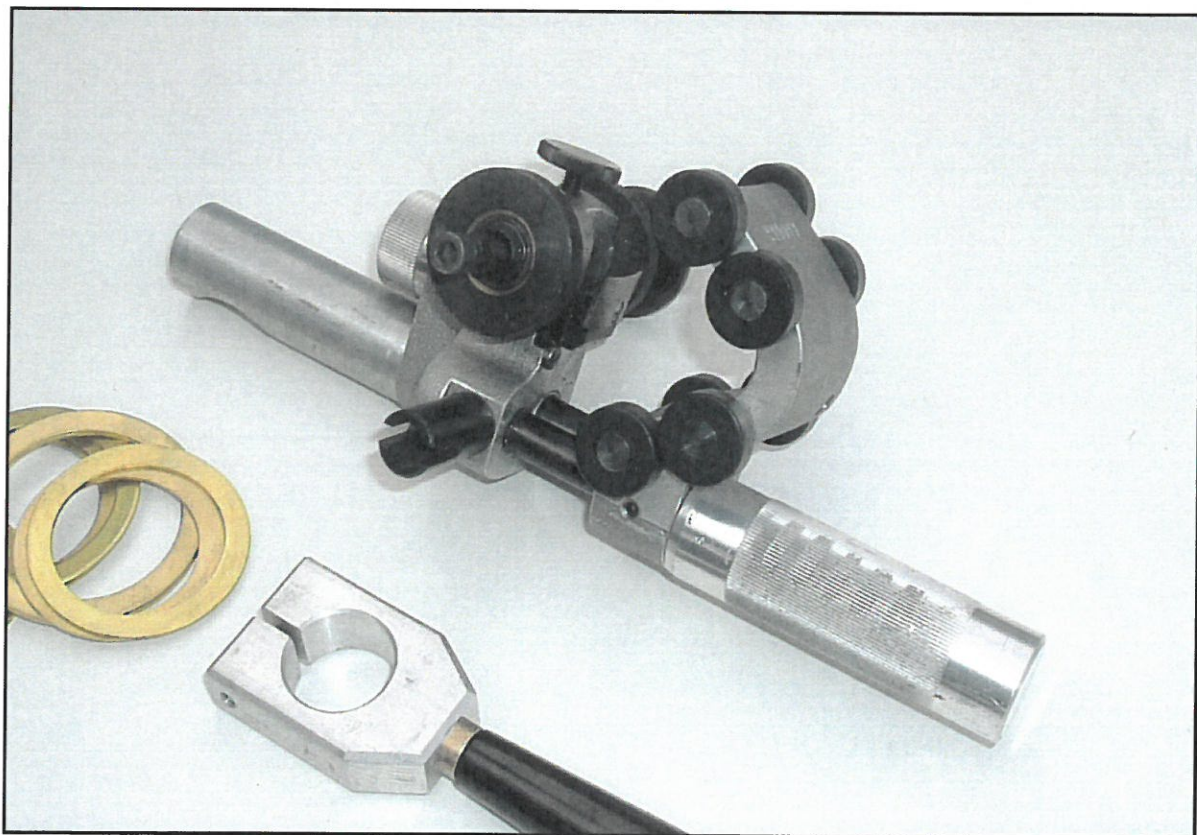

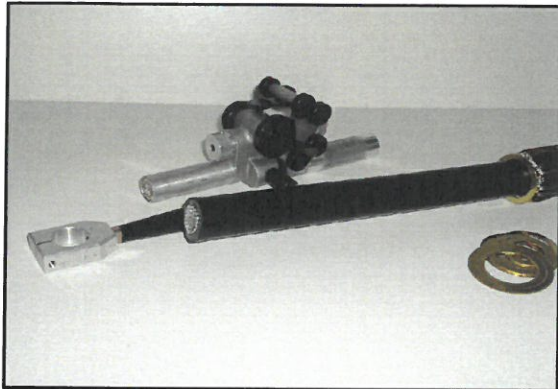


1. Preparation of the cable

Cutting of the outer sheath at the needed length +100mm. Straighten the cable and place a stop ring with correct size.

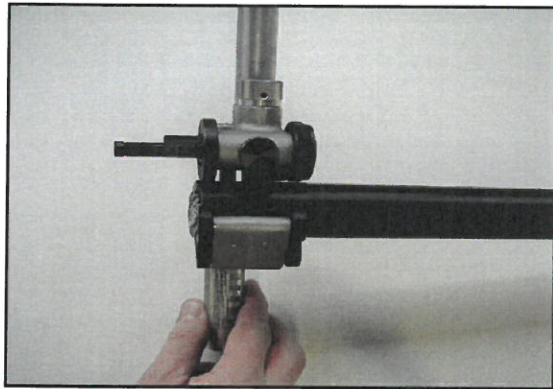


2. Place the tool

Push stripping tool over the cable and fix it with locking handle so that all rolls are placed.

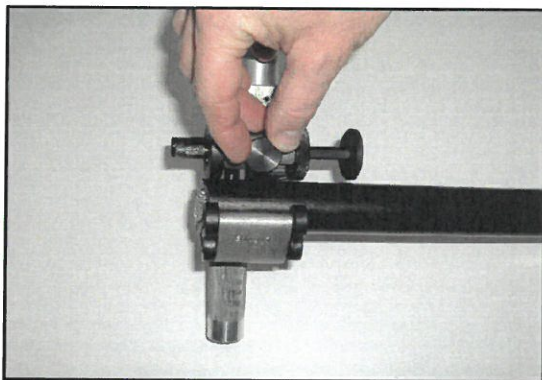

3. Setting of distance


Adjust the correct distance and fix.

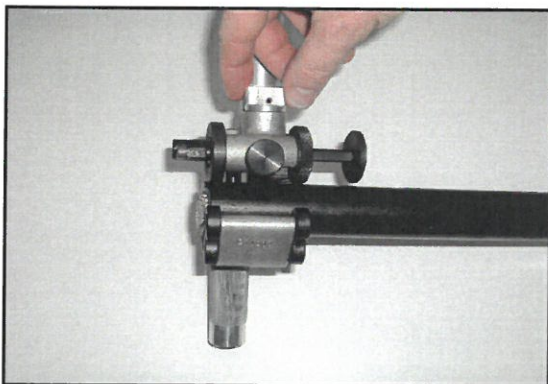

4. Setting of cutting depth


The adjustment of cutting depth is made in steps of 0.1 mm during the rotation of the tool. The correct depth is made when the black semi-con is removed completely.

(chip: 1/3 black - 2/3 white)

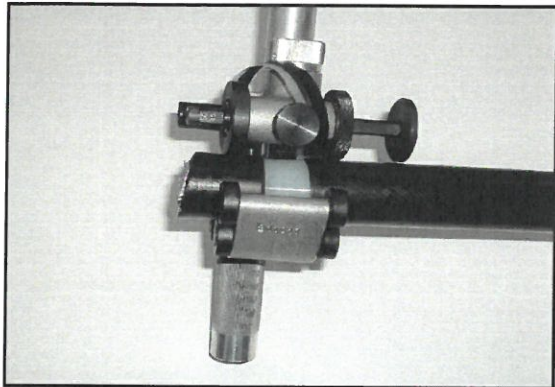


5. Stripping process 1

Start stripping process just by turning the tool on the handle. Place the stripped chip/strip on the strip-deflector.

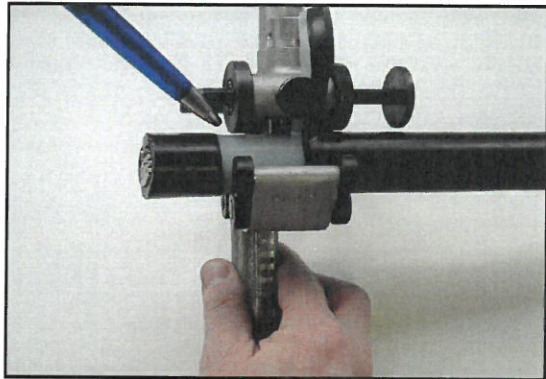


6. Re-setting

When the 2nd rollers have reached the stripped surface fix the tool again by tighten the locking handle.

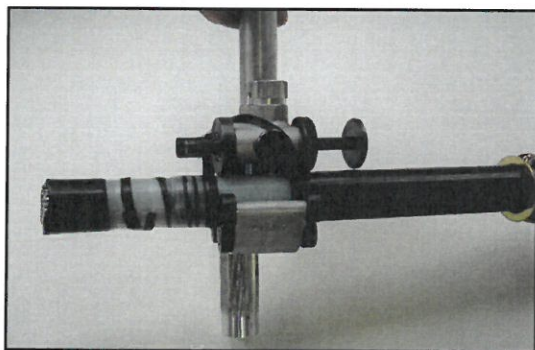

7. Stripping process 2

Continue with stripping process, it will stop when the tool is reaching the stop ring.

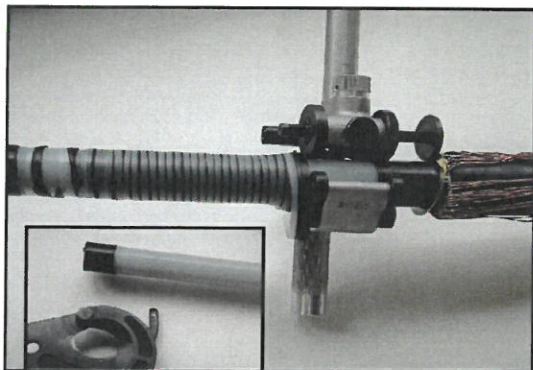

8. Finishing stripping process

Replace tool from the cable. Check the surface of the cable.

Cut and remove the cable end which has not been stripped.

Remove insulation with cable stripper **GB-M20**




Telefax to +49(0)6233 37547-600

Attention !!! During use and changing of the blades: blades have a sharp edge. Tools are not to be used for preparation of cables until electrical power is not switched off. Please read the instruction carefully. We will not accept claims due to an incorrect use of the tools.



Customer:

Date:
 Client-No.:

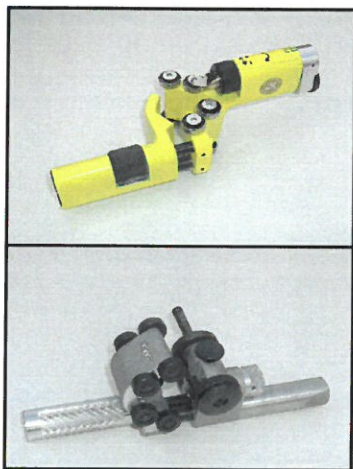

Article no.	Description	Price €/pcs.
GB-M20	Sheath stripper	
GB-M20-S9	Plastic insert	
GB-M20-S10	Set of rolls (8 pcs.)	
GB-M20-S8	Blades 30KV(5pcs.)	
GB-L20	Stripping tool	
GB-L20-S8	Blades (5pcs.)	
GB-ASL20-S9	Set of distance rings	
GB-L20-S11	Handle	
GB-LM20	Box	
GB-L10	Stripping tool 10 KV	
GB-KG-05-3	Chamfering tool	
GB-MKS-500	Cable cutter	

Terms of payment: 14 days less 2 % Skonto;
 30 days net.
 Terms of delivery: Ex works, excluding
 package
 Minimum order value: € 100.00

GBZ Mannheim GmbH & Co.KG
 Adam-Opel-Straße 7
 D 67227 Frankenthal
 Telefon: +49(0)6233 37547-0
 Telefax: +49(0)6233 37547-600

www.gb-z.de

verkauf@gb-z.de